

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 156 596 A1**

(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 158(3) EPC

(43) Date of publication:  
21.11.2001 Bulletin 2001/47

(51) Int Cl.7: **H04B 7/06**, H04B 7/08,  
H04B 7/26, H04J 13/00

(21) Application number: **00976346.7**

(86) International application number:  
**PCT/JP00/08151**

(22) Date of filing: **20.11.2000**

(87) International publication number:  
**WO 01/43311 (14.06.2001 Gazette 2001/24)**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventor: **MIYOSHI, Kenichi**  
Yokohama-shi, Kanagawa 232-0066 (JP)

(30) Priority: **06.12.1999 JP 34646899**

(74) Representative: **Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)**

(71) Applicant: **MATSUSHITA ELECTRIC INDUSTRIAL  
CO., LTD.**  
Kadoma-shi, Osaka 571-8501 (JP)

(54) **COMMUNICATION TERMINAL AND WIRELESS COMMUNICATION METHOD**

(57) In closed-loop transmission diversity, a communication terminal apparatus calculates a phase correcting value for compensating for an effect of phase rotation due to the transmission diversity, using known

feedback information, and corrects a received signal on a communication channel based on the phase correcting value, or corrects a channel estimation value based on the phase correcting value.

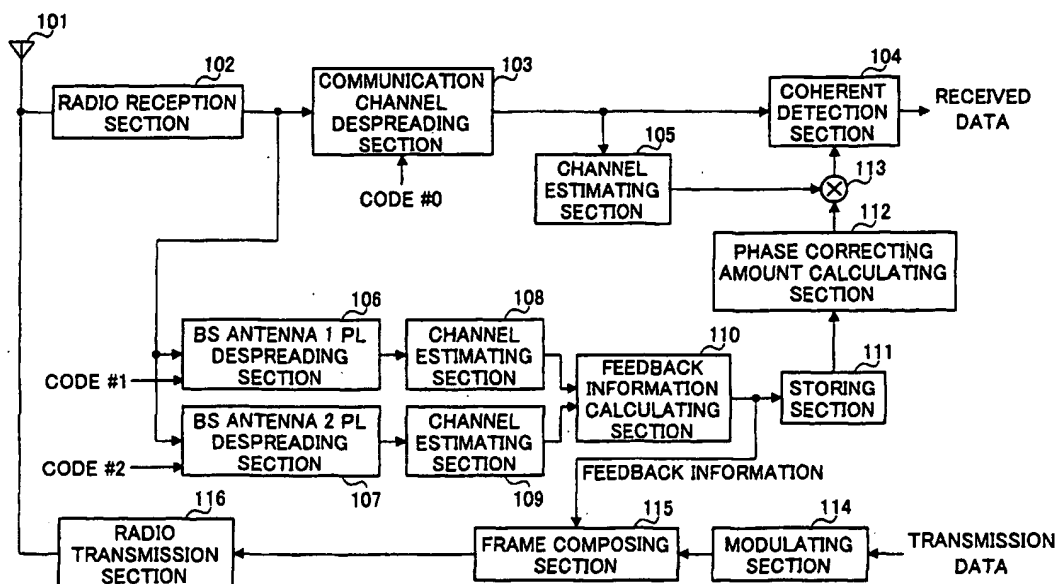


FIG.9

## Description

### Technical Field

**[0001]** The present invention relates to a communication terminal apparatus and radio communication method in a digital radio communication system, and more particularly to a communication terminal apparatus and radio communication method in a DS-CDMA (Direct Sequence-Code Division Multiple Access) system.

### Background Art

**[0002]** In a mobile communication the received signal quality deteriorates extremely due to fading. There exists a diversity technique as an effective method for the fading. The diversity technique is to prevent received signal power from falling on a receiver side. However, there are various restrictions to achieve the diversity in a communication terminal apparatus such as a mobile station. Therefore, in order to achieve on a transmitter side of a base station the diversity that is originally expected to be achieved on a receiver side of the mobile station, transmission diversity has been examined.

**[0003]** In the transmission diversity, as illustrated in FIG.1, base station 1 transmits signals of the same phase from antennas 1 and 2 to mobile station 2, and mobile station 2 selects a received signal with a higher level transmitted from one of the antennas.

**[0004]** Meanwhile, in the DS-CDMA system, the standardization of the transmission diversity is promoted currently that a base station uses closed-loop transmission diversity. There are three modes in the closed-loop transmission diversity. For example, when mode 2 of the closed-loop transmission diversity is applied, a base station provides a signal of antenna 2 with phase rotation ( $90^\circ$  shift) with respect to a signal of antenna 1 to transmit. Using signals transmitted from antennas 1 and 2, the mobile station judges a phase difference to be provided between the both signals, and transmits the phase difference information to the base station. The base station transmits signals according to the phase difference information. This processing is executed for each slot. Therefore, the mobile station receives signals with a phase rotated greatly for each slot.

**[0005]** With reference to FIGs.2 to 8, phases of received signals will be described below that are received at a mobile station when a base station applies mode 2 of the closed-loop transmission diversity.

**[0006]** The base station transmits common pilot channel signals (common known signals) of the same phase from antennas 1 and 2. At this point, the common pilot channel signal transmitted from antenna 1 is spread with a different spreading code from a spreading code that is used in the common pilot channel signal transmitted from antenna 2.

**[0007]** In transmitting communication channel signals from the base station, since the phase rotation control

is not performed at a general condition that is not of the closed-loop transmission diversity, the base station transmits the signals to the mobile station using only antenna 1. In the closed-loop transmission diversity, as illustrated in FIG.6, a signal to be transmitted from antenna 2 is provided with a phase designated by feedback information transmitted from the mobile station, and thereby the phase rotation control is performed to transmit signals.

**[0008]** When the mobile station receives the signals thus transmitted from the base station, since with respect to common pilot channel signals, different signals are transmitted from antennas 1 and 2, channel estimation is capable of being performed for each transmission antenna. In other words, as illustrated in FIG.3, the mobile station receives signals with different phase rotations respectively from antennas 1 and 2, and therefore channels are estimated separately on the common pilot channel signal transmitted from antenna 1 and the common pilot channel signal transmitted from antenna 2.

**[0009]** Based on the two channel estimation values, the mobile station determines a phase difference to be provided between signals to be respectively transmitted from antennas 1 and 2, and then notifies the base station of the phase difference (feedback information).

**[0010]** The setting of the feedback information is herein explained.

**[0011]** As described above, the base station transmits the common pilot channel signals respectively using antennas 1 and 2. The mobile station performs the channel estimation on the common pilot channel signals, and thereby is capable of calculating a phase rotation amount and amplitude variation due to fading on each of antennas 1 and 2.

**[0012]** As illustrated in FIG.2, when the base station transmits common pilot channel signals with the same amplitude and same phase (phase=0) respectively from antennas 1 and 2, the mobile station receives signals as illustrated in FIG.3. In FIG.3,  $\alpha$  is indicative of the phase rotation due to fading provided on the transmission signal from antenna 1, while  $\beta$  is indicative of the phase rotation due to fading provided on the transmission signal from antenna 2.

**[0013]** As illustrated in FIG.4, when the base station transmits communication channel signals with the same amplitude and same phase (phase=0) respectively from antennas 1 and 2, the mobile station receives signals as illustrated in FIG.5. In FIG.5, A is indicative of an amplitude variation due to fading provided on the transmission signal from antenna 1, while B is indicative of an amplitude variation due to fading provided on the transmission signal from antenna 2. In the mobile station, signals transmitted from antennas 1 and 2 are combined and received as a signal indicated by a bold arrow as illustrated in FIG.5. At this point, the phase of the combined vector is  $\Phi$  before.

**[0014]** In this case, since  $\beta - \alpha$  is about  $90^\circ$ , it is expected that rotating the phase of a signal from antenna

2 by  $-90^\circ$  increases the combined vector composed of the signals transmitted antennas 1 and 2. Therefore, the phase of a signal from antenna 2 is set to  $-90^\circ$ , and the mobile station notifies the base station of feedback information (phase difference) for requesting the base station to transmit the signal with the phase difference.

[0015] When the feedback information is notified to the base station correctly, a communication channel signal is transmitted on a next slot as illustrated in FIG.6. In other words, the signal with a phase shifted  $-90^\circ$  is transmitted from antenna 2. As a result, the mobile station receives signals as illustrated in FIG.7. At this point, the phase of the combined vector is  $\Phi$  after. Accordingly, even when the fading environment does not change, in the mobile station a phase shift is caused like  $\Phi$  after and  $\Phi$  before due to the phase addition in antennas on a transmitting side.

[0016] On the communication channel-of the mobile station, by increasing channel estimation accuracy, control is performed that channel estimated results of a plurality of slots are weighted to be added. This control is performed on the assumption that a phase rotation amount due to a fading variation is small with respect to the number of slots whose channel estimated results are added. However, as described above, when the closed-loop transmission diversity is applied, since the channel estimation value varies even when the fading does not varies, it is not possible to calculate an accurate channel estimation value by averaging channel estimation values of a plurality of slots to use, and thereby reception performance deteriorates.

#### Disclosure of Invention

[0017] It is an object of the present invention to provide a communication terminal apparatus and radio communication method enabling excellent reception performance without deterioration of channel estimation accuracy even in transmission diversity using closed-loop transmission diversity.

[0018] The inventors of the present invention paid attention to that in the closed-loop transmission diversity, when a phase rotates due to the transmission diversity control, a communication terminal notifies feedback information (phase rotation amount) to a base station on a last slot, and that the communication terminal knows a phase difference to be provided between corresponding slots to be transmitted respectively from antennas 1 and 2, found out that the communication terminal is capable of performing accurate channel estimation even in the closed-loop transmission diversity by correcting a received signal using the known phase difference, and carried out the present invention.

[0019] That is, it is a gist of the present invention that in the closed-loop transmission diversity, a communication terminal apparatus calculates a phase correcting value for compensating for an effect of the phase rotation due to the transmission diversity, using the feed-

back information known in the communication terminal apparatus, corrects a received signal on a communication channel based on the phase correcting value, or corrects a channel estimation value based on the phase correcting value, and thereby exhibits excellent reception performance.

#### Brief Description of Drawings

##### [0020]

FIG.1 is a diagram to explain transmission diversity; FIG.2 is a diagram illustrating phases of transmission signals in a base station in common pilot channel signal before phase rotation control is performed;

FIG.3 is a diagram illustrating phases of received signals in a mobile station in the common pilot channel signal before the phase rotation control is performed;

FIG.4 is a diagram illustrating phases of transmission signals in the base station in communication channel signal before the phase rotation control is performed;

FIG.5 is a diagram illustrating phases of received signals in the mobile station in the communication channel signal before the phase rotation control is performed;

FIG.6 is a diagram illustrating phases of transmission signals in the base station in the communication channel signal after the phase rotation control is performed;

FIG.7 is a diagram illustrating phases of received signals in the mobile station in the communication channel signal after the phase rotation control is performed;

FIG.8 is a diagram illustrating phases of received signals in the mobile station in the common pilot channel signal after the phase rotation control is performed;

FIG.9 is a block diagram illustrating a configuration of a communication terminal apparatus according to a first embodiment of the present invention;

FIG.10 is a block diagram illustrating a configuration of a communication terminal apparatus according to a second embodiment of the present invention;

FIG.11 is a block diagram illustrating a configuration of a phase correcting amount calculating section in the communication terminal apparatus according to the above second embodiment;

FIG.12 is a block diagram illustrating a configuration of a communication terminal apparatus according to a third embodiment of the present invention; and FIG.13 is a diagram to explain coherent detection in the communication terminal apparatus according to this embodiment.

# Best Mode for Carrying Out the Invention

**[0021]** Embodiments of the present invention will be described specifically below with reference to accompanying drawings.

(First embodiment)

**[0022]** FIG.9 is a block diagram illustrating a configuration of a communication terminal apparatus according to the first embodiment of the present invention. A signal received at antenna 101 is output to radio reception section 102. Radio reception section 102 performs predetermined radio reception processing (such as downconverting and A/D conversion) on the received signal.

**[0023]** A communication channel signal is subjected to the radio reception processing, and is output to communication channel despreading section 103 to be despread with a spreading code #0 used in spreading in a base station apparatus. The signal subjected to despreading (despread signal) is output to coherent detection section 104 and channel estimating section 105.

**[0024]** Channel estimating section 105 performs channel estimation using the despread signal to obtain a channel estimation value. The channel estimation value is subjected to phase correction using a phase correcting value obtained as described later, and the phase-corrected channel estimation value is output to coherent detection section 104. Coherent detection section 105 performs coherent detection on the despread signal according to the phase-corrected channel estimation value, and obtains received data.

**[0025]** Meanwhile, a common pilot channel signal is subjected to the radio reception processing in radio reception section 102, and is output to BS antenna 1PL despreading section 106 and BS antenna 2PL despreading section 107. Each of BS antenna 1PL despreading section 106 and BS antenna 2PL despreading section 107 despreads the radio-reception processed signal using a respective spreading code used in spreading in the base station apparatus to obtain a desired despread signal. Specifically, BS antenna 1PL despreading section 106 performs the despreading using a spreading code #1, and acquires a signal transmitted from antenna 1 of the base station apparatus, while BS antenna 2PL despreading section 107 performs the despreading using a spreading code #2, and acquires a signal transmitted from antenna 2 of the base station apparatus.

**[0026]** The despread signal in BS antenna 1PL despreading section 106 is output to channel estimating section 108. Channel estimating section 108 performs channel estimation on the signal transmitted from antenna 1 of the base station apparatus. The despread signal in BS antenna 2PL despreading section 107 is output to channel estimating section 109. Channel estimating section 109 performs channel estimation on the signal transmitted from antenna 2 of the base station ap-

paratus.

**[0027]** The channel estimation values obtained in channel estimating sections 108 and 109 are output to feedback information calculating section 110. Feedback information calculating section 110 calculates feedback information based on the respective channel estimation values on the signals transmitted from antennas 1 and 2 of the base station apparatus. The feedback information is output to frame composing section 115 on a transmitter side to be notified to the base station apparatus, while being output to storing section 111 to be stored.

**[0028]** Phase correcting amount calculating section 112 acquires the feedback information stored in storing section 111, and calculates a phase correcting amount with respect to a phase provided on a base station apparatus side in the closed-loop transmission diversity. The phase correcting amount is multiplied in multiplier 113 by the channel estimation value obtained from the communication channel signal previously mentioned. A channel estimation value is thereby obtained with the phase rotation canceled that is provided on the base station apparatus side in the closed-loop transmission diversity. The channel estimation value with the phase rotation canceled is output to coherent detection section 104.

**[0029]** On the transmitter side, transmission data is output to modulating section 114 to be digital-modulated therein. The modulated transmission data is output to frame composing section 115. Frame composing section 115 performs frame composition using the modulated transmission data and the feedback information obtained from the channel estimation value on the common pilot channel signal. The frame-composed transmission data and feedback information is output to radio transmission section 116 to be subjected to predetermined radio transmission processing (such as D/A conversion and upconverting), and is transmitted to the base station apparatus through the antenna.

**[0030]** The operation of the communication terminal apparatus according to this embodiment will be described below. In addition, a case is explained that the closed-loop transmission diversity is of mode 2.

**[0031]** As illustrated in FIG.2, when common pilot channel signals with the same amplitude and same phase (phase=0) are transmitted respectively from antennas 1 and 2 of the base station, the mobile station receives signals as illustrated in FIG.3. The thus received signal is despread in BS antenna 1PL despreading section 106 with the spreading code #1, and the despread signal is output to channel estimating section 108. Channel estimating section 108 performs the channel estimation on the common pilot channel signal transmitted from antenna 1 of the base station apparatus. The received signal is also despread in BS antenna 2PL despreading section 107 with the spreading code #2, and the despread signal is output to channel estimating section 109. Channel estimating section 109 performs the channel estimation on the common pilot channel sig-

nal transmitted from antenna 2 of the base station apparatus.

[0032] Respective channel estimation values obtained in channel estimating sections 108 and 109 are output to feedback information calculating section 110. Feedback information calculating section 110 calculates the feedback information using two channel estimation values as described below.

[0033] The communication channel signal with the amplitude and phase (phase=0) illustrated in FIG.4 transmitted from the base station apparatus is received as illustrated in FIG.5. Communication channel signals -transmitted from antennas 1 and 2 are combined and received as a signal indicated by a bold arrow as illustrated in FIG.5. At this point, the phase of the combined vector is  $\Phi$  before.  $\Phi$  before is stored in storing section 111. In FIG.5, A is indicative of the amplitude variation due to fading provided on the transmission signal from antenna 1, while B is indicative of the amplitude variation due to fading provided on the transmission signal from antenna 2.

[0034] As can be seen from FIG.3, since a phase rotation difference  $\beta-\alpha$  due to fading is about  $90^\circ$  between signals transmitted from antennas 1 and 2, it is expected that rotating the phase of the signal from antenna 2 by  $-90^\circ$  increases the combined vector composed of the signals transmitted antennas 1 and 2.

[0035] In the mode 2 of the closed-loop transmission diversity, since there are 4 kinds of phase differences, i.e.,  $0^\circ$ ,  $+90^\circ$ ,  $180^\circ$  and  $-90^\circ$ , which are provided intentionally on a base station apparatus side, the phase of a signal from antenna 2 is set to  $-90^\circ$ . The feedback information is thus calculated.

[0036] The communication terminal apparatus notifies the base station apparatus of the feedback information (phase difference) calculated in feedback information calculating section 110. Specifically, since the phase differences of the feedback information are of 4 kinds and each is indicated by 2 bits, the feedback information composed of 2 bits is output to frame composing section 115, and frame composing section 115 composes a frame with the information and transmission data. The feedback information in the frame-composed transmission signal is notified to the base station apparatus.

[0037] When the base station apparatus receives the received signal and acquires the feedback information, the apparatus transmits on a next slot a communication channel signal provided with a phase difference corresponding to the feedback information to the communication terminal apparatus. That is, as illustrated in FIG. 5., the signal with a phase of  $-90^\circ$  is transmitted from antenna 2.

[0038] The communication terminal apparatus receives signals as illustrated in FIG. 7. At this point, the phase of the combined vector is  $\Phi$  after,  $\Phi$  after is obtained in phase correcting amount calculating section 112 as described below. FIG.8 illustrates phases of re-

ceived common pilot channel signals transmitted from the base station apparatus with the phase rotation provided according to the feedback information. In FIG.8,  $\alpha'$  is indicative of the phase rotation due to fading provided on the transmission signal from antenna 1,  $\beta'$  is indicative of the phase rotation due to fading provided on the transmission signal from antenna 2, A' is indicative of the amplitude variation due to fading provided on the transmission signal from antenna 1, and B' is indicative of the amplitude variation due to fading provided on the transmission signal from antenna 2.

[0039] Accordingly,  $\Phi$  after is calculated using these values in the equation that  $\Phi$  after =  $\tan^{-1}(A'\cos\alpha' + B'\cos(\beta'-90^\circ) / A'\sin\alpha' + B'\sin(\beta'-90^\circ))$ .

[0040] The phase rotation amount by the phase addition in the closed-loop transmission diversity is obtained from a difference between  $\Phi$  before and  $\Phi$  after. Accordingly, phase correcting amount calculating section 112 first obtains  $\Phi$  after, then obtains the difference between  $\Phi$  before and  $\Phi$  after using  $\Phi$  before stored in storing section 111, and thereby obtains the phase correcting amount.

[0041] Channel estimating section 105 of the communication terminal apparatus performs channel estimation on a communication channel signal with a phase rotation provided by the closed-loop transmission diversity transmitted from a base station apparatus. The channel estimation value obtained in channel estimating section 105 is multiplied by the phase correcting amount described previously in multiplier 113. The channel estimation value is thereby obtained that is corrected in the phase rotation provided by the closed-loop transmission diversity. The corrected channel estimation value is output to coherent detection section 104. Coherent detection section 104 performs coherent detection on the communication channel signal using the corrected channel estimation value.

[0042] It may be possible to provide channel estimating section 105 with a processing section for averaging channel estimation values over a plurality of slots. For example, as illustrated in FIG.13, phase-corrected channel estimation values corresponding to three slots (N-1, N and N+1) of quadrature component (Q channel) are weighted to be averaged, a channel estimation value  $\xi_N$  on the slot N is thereby obtained, and data of in-phase component (I channel) is subjected to coherent detection using  $\xi_N$ . It is thereby possible to improve the channel estimating accuracy on a communication channel, and to perform more accurate channel estimation even when the closed-loop transmission diversity is applied.

[0043] In this coherent detection, since the channel estimation value is used in which only fading variation is reflected, the channel estimation is capable of being performed by averaging channel estimation values on a plurality of slots to perform the channel estimation. As a result, excellent reception performance is obtained even in the closed-loop transmission diversity.

**[0044]** Thus, the communication terminal apparatus according to this embodiment, in the closed-loop transmission diversity, calculates a correcting value for compensating for an effect of the phase rotation in the closed-loop transmission diversity using feedback information that is known on a side of the communication terminal apparatus, corrects a received signal on a communication channel based on the correcting value, and thereby is capable of performing accurate channel estimation and exhibiting excellent reception performance.

**[0045]** In addition, in this embodiment, the channel estimation value of a communication channel signal is multiplied by the phase correcting value so as to compensate for an effect of the phase rotation in the closed-loop transmission diversity. However, it may be also possible in this embodiment to multiply a communication channel signal by the phase correcting value so as to compensate for an effect of the phase rotation in the closed-loop transmission diversity, and then to perform channel estimation on the compensated communication channel signal. In addition, in order to decrease the number of multiplying calculations (to one time), it is preferable to multiply the channel estimation value by the phase correcting value.

(Second embodiment)

**[0046]** It is considered in the first embodiment that when incorrect feedback information arrives at a base station apparatus, a communication terminal apparatus may perform correction that is not necessary. Therefore, in this embodiment, a case will be described that coherent detection is performed on both communication channel signals which are subjected and not subjected to correction, and that one with a higher communication quality is used as a coherent detection result. In addition, a case is explained that as a criterion for evaluating the communication quality, SIR (Signal to Interference Ratio) is used.

**[0047]** FIG.10 is a block diagram illustrating a configuration of a communication terminal apparatus according to the second embodiment of the present invention. In FIG.10, the same sections as in FIG.9 are assigned the same reference numerals as in FIG.9, and detailed explanation thereof are omitted.

**[0048]** The communication terminal apparatus illustrated in FIG.10 has multiplier 201 that multiplies a despread signal from communication channel despread-ing section 103 by a phase correcting value calculated in phase correcting amount calculating section 112, SIR comparing section 203 which measures SIR on a coherent detection result of a despread signal subjected to phase correction and SIR on another coherent detection result obtained by performing coherent detection on the despread signal without performing the phase correction and which compares both measured results with each other, and selecting section 202 that selects one of the coherent detection results based on the compared

result of SIR.

**[0049]** In the communication terminal apparatus with such a configuration, coherent detection section 104 performs coherent detection on a despread signal from communication channel despread-ing section 103, and outputs the coherent detection result to SIR comparing section 203. Meanwhile, multiplier 201 multiplies the despread signal from communication channel despread-ing section 103 by the phase correcting value calculated in phase correcting amount calculating section 112. In addition, the phase correcting value is calculated in the same as in the first embodiment. The phase-corrected despread signal (communication channel signal) is output to coherent detection section 104. Coherent detection section 104 performs the coherent detection on the phase-corrected despread signal, and outputs the coherent detection result to SIR comparing section 203.

**[0050]** SIR comparing section 203 measures SIR on the two coherent detection results, and compares the measured results. The compared result is output to selecting section 202. Selecting section 202 receives as its inputs the two coherent detection results from coherent detection section 104, and based on the compared result from SIR comparing section 203, selects one coherent detection result with an excellent communication quality.

**[0051]** In this case, the coherent detection on the phase-corrected despread signal is selected when the phase correction should be performed, while the coherent detection result on the despread signal that is not subjected to the phase correction is selected when the phase correction should not be performed.

**[0052]** Further in this embodiment, it may be possible to configure phase correcting amount calculating section 112 as illustrated in FIG.11. The following operation is performed in this configuration. Since a communication terminal apparatus stores the feedback information, the terminal apparatus knows a phase of a signal transmitted from a base station apparatus. Accordingly, the terminal apparatus calculates a candidate of a phase of a signal that is expected to receive when the signal of each phase (for example, 0°, +90°, - 90° and 180°) is transmitted. Specifically, received phase candidate calculating section 204 acquires feedback information stored in storing section 111, and based on the feedback information, calculates received phase candidates.

**[0053]** The received phase candidates are output to comparing section 205. Comparing section 205 compares each of the received phase candidates with an actual phase of a received signal obtained from the despread signal, and outputs compared results to judging section 206. Judging section 206 selects a received phase candidate with the smallest angle difference between the compared results. Selecting the received phase candidate is equivalent to judging that a signal with the phase is transmitted from the base station apparatus. The judged result is output to correcting value calculating section 207. Based on the judged phase,

correcting value calculating section 207 calculates a phase correcting amount.

[0054] Thus, by configuring phase correcting amount calculating section 112 in the way described above, even when a base station apparatus receives incorrect feedback information, it is possible to perform accurate channel estimation and to exhibit excellent reception performance.

[0055] In the above-mentioned embodiment, the case is explained that a communication terminal apparatus calculates a phase correcting value using the feedback information to be transmitted to a base station apparatus. However, the present invention is capable of being applied to a case that a communication terminal apparatus does not use the feedback information to be transmitted to a base station apparatus.

[0056] For example, since all  $n$  types of phase rotation amounts (for example,  $0^\circ$ ,  $90^\circ$ ,  $180^\circ$  and  $-90^\circ$ ) are predetermined that have a possibility of being provided by a base station apparatus in the closed-loop transmission diversity, a communication terminal apparatus is capable of calculating a phase predict value of a received communication channel signal transmitted with each phase rotation amount provided. Each phase predict value is compared with a phase of a channel estimation value obtained from a received communication channel signal, and each angle difference is obtained. These angle differences are used as likelihood. In other words, a phase rotation amount with the highest likelihood (smallest angle difference) is selected from among  $n$  types of them. The phase correcting value is calculated based on the selected phase rotation amount.

[0057] The need for communicating the feedback information with a base station apparatus is thereby eliminated, whereby it is possible to simplify the communication control and also to improve the transmission efficiency.

[0058] When a communication terminal apparatus thus compares a phase predict value with a phase of a channel estimation value to select a phase rotation amount, the terminal apparatus uses the feedback information to be transmitted to a base station apparatus. When the communication terminal apparatus transmits the feedback information to the base station apparatus, a case may occur that the base station apparatus receives erroneous feedback information. In this case, by using both the phase rotation amount obtained by using the phase predict value as described above and the feedback information, the communication terminal apparatus is capable of identifying the phase rotation amount provided by the base station apparatus with high accuracy.

[0059] When the feedback information is composed of a plurality of bits, a probability that erroneous information is transmitted is not the same on all the phase rotation amounts. For example, the probability that 2 bits are erroneous is lower than the probability that 1 bit is

erroneous. Therefore the probability that a base station apparatus transmits signals according to the feedback information with two erroneous bits is lower than the probability that the base station apparatus transmits signals according to the feedback information with one erroneous bit.

[0060] For example, when the feedback information is transmitted with bits 00 indicative of  $0^\circ$ , bits 01 indicative of  $90^\circ$ , bits 10 indicative of  $180^\circ$ , and bits 11 indicative of  $-90^\circ$  and the communication terminal apparatus transmits bits 00, the probability that the base station apparatus receives bits 11 incorrectly is lower than the probability that the base station apparatus receives bits 01 or 10 incorrectly. Accordingly, when the communication terminal apparatus transmits bits 00, it is more likely for the base station apparatus to receive the bits as  $90^\circ$  or  $180^\circ$  than as  $-90^\circ$ . Then the likelihood calculated with  $90^\circ$  or  $180^\circ$  is more weighted than the likelihood calculated with  $-90^\circ$ . It is thereby possible to improve the accuracy in judging the phase rotation with which the base station apparatus provides a signal in transmitting.

[0061] Thus, according to the present invention, coherent detection is performed on both communication channel signals which are subjected and not subjected to phase correction, and one with an excellent communication quality is used as a coherent detection result, whereby even when incorrect feedback information arrives at a base station apparatus, it is possible to perform accurate channel estimation and to exhibit excellent reception performance. The present invention thereby enables excellent reception performance with higher accuracy in the closed-loop transmission diversity.

(Third embodiment)

[0062] As phase rotation amounts in the closed-loop transmission diversity, angles ( $0^\circ$ ,  $+90^\circ$ ,  $180^\circ$  and  $-90^\circ$ ) are predetermined. In this embodiment, a case is explained that a communication terminal apparatus calculates correcting values always corresponding to all the phase rotation amounts, performs the coherent detection while performing the phase correction, and adopts, as the coherent detection result, one with an excellent communication quality among the coherent detection results. In addition, a case is explained that as a criterion for evaluating the communication quality, SIR (Signal to Interference Ratio) is used.

[0063] FIG. 12 is a block diagram illustrating a configuration of a communication terminal apparatus according to the third embodiment of the present invention. In FIG. 12, the same sections as in FIG. 9 are assigned the same reference numerals as in FIG. 9, and detailed explanation thereof are omitted.

[0064] The communication terminal apparatus illustrated in FIG. 12 has a plurality of multipliers 403 each of which multiplies a despread signal from communication channel despreading section 103 by a phase cor-

recting value calculated in phase correcting amount calculating section 402 using phase rotation information table 401, SIR comparing section 404 which measures SIR on each-coherent detection result of the despread signal subjected to phase correction and which compares the measured results with each other, and selecting section 405 that selects one of the coherent detection results based on the compared result of SIR.

**[0065]** In the communication terminal apparatus with such a configuration, the phase rotation amounts which are predetermined in the closed-loop transmission diversity are stored in phase rotation information table 401. Phase correcting amount calculating section 402 refers to the phase rotation amounts in phase rotation amount information table 401 to calculate phase correcting values. In addition, the phase correcting values are calculated in the same way as in the first embodiment.

**[0066]** Each of multipliers 403 multiplies the despread signal from communication channel despreding section 103 by a respective phase correcting value calculated in phase correcting amount calculating section 402. At this point, multipliers 403 multiply the despread signal respectively by the phase correcting values corresponding to all the phase rotation amounts predetermined in the closed-loop transmission diversity. Then, the phase-corrected despread signals (communication channel signals) are output to coherent detection section 104. Coherent detection section 104 performs coherent detection on each phase-corrected despread signal, and outputs the coherent detection result to SIR comparing section 404.

**[0067]** SIR comparing section 404 measures respective SIR on all the coherent detection results, and compares the measured results. The compared result is output to selecting section 405. Selecting section 405 receives as its inputs all the coherent detection results from coherent detection section 104, and based on the compared result from SIR-comparing section 404, selects one coherent detection result with an excellent communication quality.

**[0068]** Thus, according to this embodiment, the coherent detection is performed with all the phase correcting values corresponding to all the phase rotation amounts predetermined in the closed-loop transmission diversity, and one with an excellent communication quality is adopted as the coherent detection result, whereby it is not necessary for a communication terminal apparatus to store the feedback information. Since the need for storing information is thereby eliminated in the closed-loop transmission diversity, it is possible to use a memory in a communication terminal apparatus effectively.

**[0069]** The present invention is not limited to the above-mentioned first to third embodiments, and is capable of being carried into practice with various modifications thereof. For example, in the above-mentioned first to third embodiments is explained the case that the

closed-loop transmission diversity is of mode 2. However, the present invention is capable of being applied to closed-loop transmission diversity of another mode. In the above-mentioned second and third embodiments is explained the case that SIR is used as a criterion for evaluating a communication quality to judge whether phase correction is needed. However, the present invention is capable of being applied to another case that as a criterion for evaluating a communication quality, another criterion other than SIR, such as likelihood, is used.

**[0070]** A communication terminal apparatus of the present invention has a configuration provided with a feedback information calculating section that calculates feedback information using respective first channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, a phase correcting amount calculating section that calculates a phase correcting amount for correcting phase rotation with which the base station apparatus provides a communication channel signal in the transmission diversity, based on the feedback information, and a coherent detection section that performs coherent detection on the communication channel signal using a second channel estimation value obtained by subjecting a channel estimation value obtained from the communication channel signal to phase correction using the phase correcting amount.

**[0071]** A communication terminal apparatus of the present invention has a configuration provided with a feedback information calculating section that calculates feedback information using respective first channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, a phase correcting amount calculating section that calculates a phase correcting amount for correcting phase rotation with which the base station apparatus provides a communication channel signal in the transmission diversity, based on the feedback information, a channel estimating section that performs channel estimation using the communication channel signal subjected to phase correction using the phase correcting amount, and a coherent detection section that performs coherent detection on the communication channel signal using a second channel estimation value obtained by the channel estimation.

**[0072]** According to these configurations, in the closed-loop transmission diversity, the communication terminal apparatus calculates the correcting value for compensating for an effect of the phase rotation due to the transmission diversity using the known feedback information, corrects a received signal on the communication channel based on the correcting value, and thereby is capable of performing accurate channel estimation and of exhibiting excellent reception performance.

**[0073]** The communication terminal apparatus of the



present invention has the above-described configuration further provided with a weighting averaging section that performs weighting on second channel estimation values over a plurality of slots to average, and performs the coherent detection on an average of weighted channel estimation values.

**[0074]** According to this configuration, it is possible to improve channel estimation accuracy on the communication channel. It is thereby possible to perform accurate channel estimation even when the closed-loop transmission diversity is applied.

**[0075]** A communication terminal apparatus of the present invention has a configuration provided with a feedback information calculating section that calculates feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, a

phase correcting amount calculating section that calculates a phase correcting amount for correcting phase rotation with which the base station apparatus provides a communication channel signal in the transmission diversity, based on the feedback information, a communication quality measuring section that measures communication qualities of the communication channel signal subjected to coherent detection and of the communication channel signal subjected to phase correction using the phase correcting amount and to coherent detection, and a selecting section that selects one with an excellent measured communication quality from the communication channel signals.

**[0076]** According to this configuration, the communication terminal apparatus performs coherent detection on both communication channel signals which are subjected and not subjected to phase correction, uses one with an excellent communication quality as a coherent detection result, and therefore is, even when incorrect feedback information arrives at a base station apparatus, capable of performing accurate channel estimation and of exhibiting excellent reception performance. The communication terminal apparatus is thereby capable of exhibiting excellent reception performance with higher accuracy in the closed-loop transmission diversity.

**[0077]** A communication terminal apparatus of the present invention has a configuration provided with a phase correcting amount calculating section that calculates a plurality of phase correcting amounts each for correcting phase rotation with which a base station apparatus provides a communication channel signal in closed-loop transmission diversity, based on the phase rotation amounts in the closed-loop transmission diversity, a communication quality measuring section that measures communication qualities of communication channel signals obtained by subjecting the communication channel signal transmitted from the base station apparatus to phase correction using the plurality of phase correcting amounts and to coherent detection, and a se-

lecting section that selects one with an excellent measured communication quality from the communication channel signals.

**[0078]** According to this configuration, the coherent detection is performed with all the phase correcting values corresponding to all the phase rotation amounts predetermined in the closed-loop transmission diversity, and one with an excellent communication quality is adopted as the coherent detection result, whereby it is not necessary for a communication terminal apparatus to store the feedback information. Since the need for storing information is thus eliminated in the closed-loop transmission diversity, it is possible to use a memory in a communication terminal apparatus effectively.

**[0079]** A communication terminal apparatus of the present invention has a configuration provided with a phase predict value calculating section that obtains a respective phase predict value in receiving a communication channel signal provided with each phase rotation, for each phase rotation amount defined in closed-loop transmission diversity, a channel estimating section that obtains a channel estimation value from a received communication channel signal, and a phase correcting amount calculating section which obtains a respective angle difference between a phase of the channel estimation value and each phase predict value, and based on the phase predict value corresponding to the angle difference with highest likelihood among the angle differences, which calculates a phase correcting amount.

**[0080]** According to this configuration, the need for communicating the feedback information with a base station apparatus is eliminated, whereby it is possible to simplify the communication control and also to improve the transmission efficiency.

**[0081]** The communication terminal apparatus of the present invention performs, in the above-mentioned configuration, weighting on likelihood corresponding to feedback information to be transmitted to a base station apparatus. According to this configuration, the communication terminal apparatus is capable of identifying the phase rotation amount provided by the base station apparatus with high accuracy.

**[0082]** A base station apparatus of the present invention has a feature of performing radio communications with the communication terminal apparatus with the above-mentioned configuration. It is thereby possible to perform the radio communications while maintaining excellent reception performance even in the closed-loop transmission diversity.

**[0083]** In a radio communication method of the present invention, in closed-loop transmission diversity, a communication terminal apparatus calculates feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus, and transmits the feedback information to the base station apparatus, the base station apparatus transmits a communication channel signal

provided with phase rotation based on the feedback information to the communication terminal apparatus, and the communication terminal apparatus calculates a phase correcting amount for correcting the phase rotation based on the feedback information, and performs coherent detection on the communication channel signal using a channel estimation value subjected to phase correction using the phase correcting amount.

**[0084]** In a radio communication method of the present invention, in closed-loop transmission diversity, a communication terminal apparatus calculates feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus, and transmits the feedback information to the base station apparatus, the base station apparatus transmits a communication channel signal provided with phase rotation based on the feedback information to the communication terminal apparatus, and the communication terminal apparatus calculates a phase correcting amount for correcting the phase rotation based on the feedback information, performs channel estimation using the communication channel signal subjected to phase correction using the phase correcting amount and performs coherent detection on the communication channel signal using a channel estimation value obtained by the channel estimation.

**[0085]** According to these methods, in the closed-loop transmission diversity, the communication terminal apparatus calculates the correcting value for compensating for an effect of the phase rotation due to the transmission diversity using the known feedback information, corrects a received signal on the communication channel based on the correcting value, and thereby is capable of performing accurate channel estimation and of exhibiting excellent reception performance.

**[0086]** In a radio communication method of the present invention, in closed-loop transmission diversity, a communication terminal apparatus calculates feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus, and transmits the feedback information to the base station apparatus, the base station apparatus transmits a communication channel signal provided with phase rotation based on the feedback information to the communication terminal apparatus, and the communication terminal apparatus calculates a phase correcting amount for correcting the phase rotation based on the feedback information, measures communication qualities of the communication channel signal subjected to coherent detection and of the communication channel signal subjected to phase correction using the phase correcting amount and to coherent detection, and selects one with an excellent measured communication quality from the communication channel signals.

**[0087]** According to this method, coherent detection

is performed on both communication channel signals which are subjected and not subjected to phase correction, and one with an excellent communication quality is used as a coherent detection result, whereby even when incorrect feedback information arrives at a base station apparatus, it is possible to perform accurate channel estimation and to exhibit excellent reception performance. The present invention thereby enables excellent reception performance with higher accuracy in the closed-loop transmission diversity.

**[0088]** In a radio communication method of the present invention, in closed-loop transmission diversity, a communication terminal apparatus calculates feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus, and transmits the feedback information to the base station apparatus, the base station apparatus transmits a communication channel signal provided with phase rotation based on the feedback information to the communication terminal apparatus, and the communication terminal apparatus calculates a plurality of phase correcting amounts each for correcting the phase rotation based on the feedback information, measures communication qualities of communication channel signals obtained by subjecting the communication channel signal transmitted from the base station apparatus to phase correction using the plurality of phase correcting amounts and to coherent detection, and selects one with an excellent measured communication quality from the communication channel signals.

**[0089]** According to this method, the coherent detection is performed with all the phase correcting values corresponding to all the phase rotation amounts predetermined in the closed-loop transmission diversity, and one with an excellent communication quality is adopted as the coherent detection result, whereby it is not necessary for a communication terminal apparatus to store the feedback information. Since the need for storing information is thus eliminated in the closed-loop transmission diversity, it is possible to use a memory in the communication terminal apparatus effectively.

**[0090]** According to the present invention as described above, in the closed-loop transmission diversity, a communication terminal apparatus calculates the correcting value for compensating for an effect of the phase rotation due to the transmission diversity using the known feedback information, corrects a received signal on the communication channel based on the correcting value, and thereby is capable of performing accurate channel estimation and of exhibiting excellent reception performance.

**[0091]** This application is based on the Japanese Patent Application No. HEI11-346468 filed on December 6, 1999, entire content of which is expressly incorporated by reference herein.

## Industrial Applicability

[0092] The present invention is applicable to a digital radio communication system, and more particularly to a communication terminal apparatus and radio communication method in a DS-CDMA system.

## Claims

## 1. A communication terminal apparatus comprising:

feedback information calculating means for calculating feedback information using respective first channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity;

phase correcting amount calculating means for calculating a phase correcting amount for correcting phase rotation with which said base station apparatus provides a communication channel signal in said transmission diversity, based on the feedback information; and

coherent detection means for performing coherent detection on the communication channel signal using a second channel estimation value obtained by subjecting a channel estimation value obtained from the communication channel signal to phase correction using the phase correcting amount.

## 2. A communication terminal apparatus comprising:

feedback information calculating means for calculating feedback information using respective first channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity;

phase correcting amount calculating means for calculating a phase correcting amount for correcting phase rotation with which said base station apparatus provides a communication channel signal in said transmission diversity, based on the feedback information;

channel estimating means for performing channel estimation using the communication channel signal subjected to phase correction using the phase correcting amount; and

coherent detection means for performing coherent detection on the communication channel signal using a second channel estimation value obtained by the channel estimation.

## 3. The communication terminal apparatus according

to claim 1, further comprising:

weighting averaging means for performing weighting on second channel estimation values over a plurality of slots to average, wherein the coherent detection is performed on an average of weighted channel estimation values.

## 4. A communication terminal apparatus comprising:

feedback information calculating means for calculating feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity;

phase correcting amount calculating means for calculating a phase correcting amount for correcting phase rotation with which said base station apparatus provides a communication channel signal in said closed-loop transmission diversity, based on the feedback information; communication quality measuring means for measuring communication qualities of the communication channel signal subjected to coherent detection and of the communication channel signal subjected to phase correction using the phase correcting amount and to coherent detection; and

selecting means for selecting one with an excellent measured communication quality from the communication channel signals.

## 5. A communication terminal apparatus comprising:

phase correcting amount calculating means for calculating a plurality of phase correcting amounts each for correcting phase rotation with which said base station apparatus provides a communication channel signal in said closed-loop transmission diversity, based on phase rotation amounts in said closed-loop transmission diversity;

communication quality measuring means for measuring communication qualities of communication channel signals obtained by subjecting the communication channel signal transmitted from said base station apparatus to phase correction using the plurality of phase correcting amounts and to coherent detection; and

selecting means for selecting one with an excellent measured communication quality from the communication channel signals.

## 6. A communication terminal apparatus comprising:

phase predict value calculating means for obtaining a respective phase predict value in

ceiving a communication channel signal provided with each phase rotation, for each phase rotation amount defined in closed-loop transmission diversity;

channel estimating means for obtaining a channel estimation value from a received communication channel signal; and

phase correcting amount calculating means for obtaining an angle difference between a phase of the channel estimation value and each phase predict value, and based on the phase predict value corresponding to the angle difference with highest likelihood among angle differences, calculating a phase correcting amount.

7. The communication terminal apparatus according to claim 6, wherein corresponding to feedback information to be transmitted to a base station apparatus, the likelihood is weighted.

8. A base station apparatus that performs radio communications with a communication terminal apparatus, said communication terminal apparatus comprising:

feedback information calculating means for calculating feedback information using respective first channel estimation values obtained from respective common known signals transmitted respectively from different antennas of said base station apparatus in closed-loop transmission diversity;

phase correcting amount calculating means for calculating a phase correcting amount for correcting a phase rotation with which said base station apparatus provides a communication channel signal in said transmission diversity, based on the feedback information; and  
coherent detection means for performing coherent detection on the communication channel signal using a second channel estimation value obtained by subjecting a channel estimation value obtained from the communication channel signal to phase correction using the phase correcting amount.

9. A radio communication method, comprising:

calculating, in a communication terminal apparatus, feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, and transmitting the feedback information to said base station apparatus;  
transmitting, in said base station apparatus, a communication channel signal provided with

phase rotation based on the feedback information to said communication terminal apparatus; and

calculating, in said communication terminal apparatus, a phase correcting amount for correcting the phase rotation based on the feedback information, and performing coherent detection on the communication channel signal using a channel estimation value subjected to phase correction using the phase correcting amount.

10. A radio communication method, comprising:

calculating, in a communication terminal apparatus, feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, and transmitting the feedback information to said base station apparatus;

transmitting, in said base station apparatus, a communication channel signal provided with phase rotation based on the feedback information to said communication terminal apparatus; and

calculating, in said communication terminal apparatus, a phase correcting amount for correcting the phase rotation based on the feedback information, performing channel estimation using the communication channel signal subjected to phase correction using the phase correcting amount, and performing coherent detection on the communication channel signal using a channel estimation value obtained by the channel estimation.

11. A radio communication method, comprising:

calculating, in a communication terminal apparatus, feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, and transmitting the feedback information to said base station apparatus;  
transmitting, in said base station apparatus, a communication channel signal provided with phase rotation based on the feedback information to said communication terminal apparatus; and

calculating, in said communication terminal apparatus, a phase correcting amount for correcting the phase rotation based on the feedback information, measuring communication qualities of the communication channel signal subjected to coherent detection and of the commu-

nication channel signal subjected to phase correction using the phase correcting amount and to coherent detection, and selecting one with an excellent measured communication quality from the communication channel signals.

5

12. A radio communication method, comprising:

calculating, in a communication terminal apparatus, feedback information using respective channel estimation values obtained from respective common known signals transmitted respectively from different antennas of a base station apparatus in closed-loop transmission diversity, and transmitting the feedback information to said base station apparatus;  
transmitting, in said base station apparatus, a communication channel signal provided with phase rotation based on the feedback information to said communication terminal apparatus;  
and  
calculating, in said communication terminal apparatus, a plurality of phase correcting amounts each for correcting the phase rotation with which said base station apparatus provides a communication channel signal in said closed-loop transmission diversity, based on the feedback information, measuring communication qualities of communication channel signals obtained by subjecting the communication channel signal transmitted from said base station apparatus to phase correction using the plurality of phase correcting amounts and to coherent detection, and selecting one with an excellent measured communication quality from the communication channel signals.

10

15

20

25

30

35

40

45

50

55

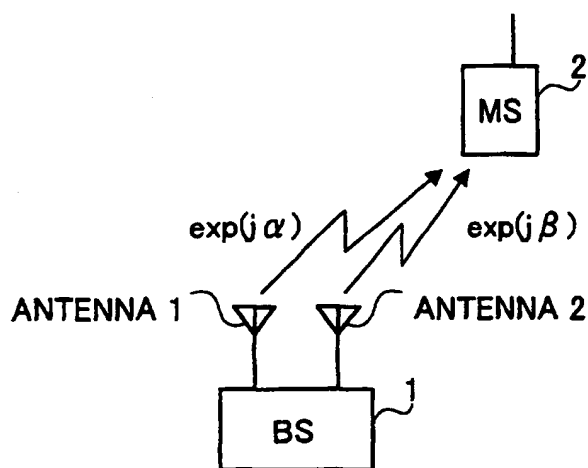


FIG.1

TRANSMISSION SIGNALS IN BASE STATION  
IN COMMON PILOT CHANNEL SIGNAL

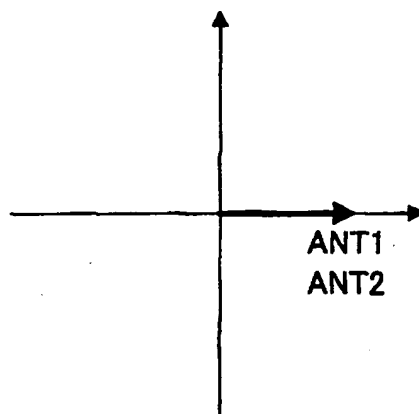


FIG.2

RECEIVED SIGNALS IN MOBILE STATION  
IN COMMON PILOT CHANNEL SIGNAL

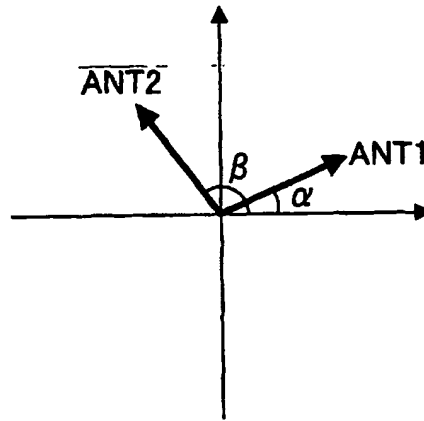


FIG.3

TRANSMISSION SIGNALS IN BASE STATION  
IN COMMUNICATION CHANNEL SIGNAL

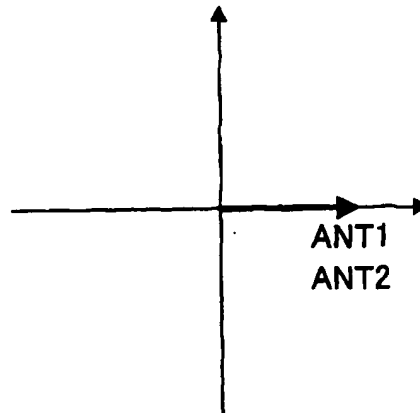


FIG.4

RECEIVED SIGNALS IN MOBILE STATION  
IN COMMUNICATION CHANNEL SIGNAL

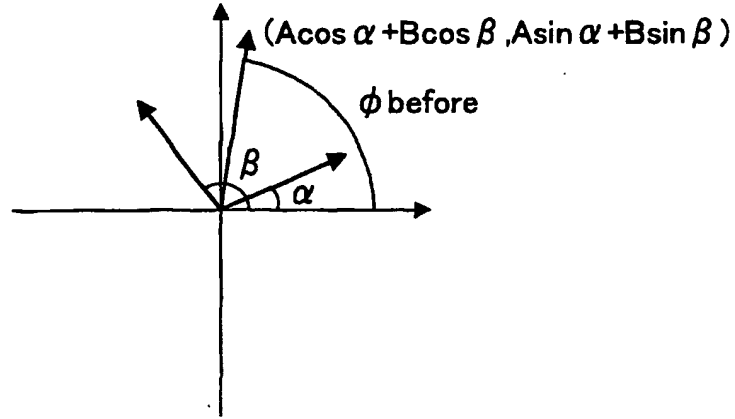


FIG.5

TRANSMISSION SIGNALS IN BASE STATION  
IN COMMUNICATION CHANNEL SIGNAL

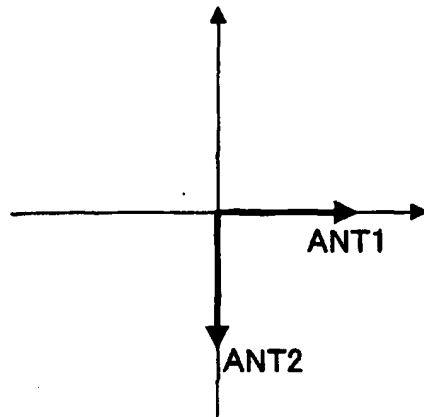


FIG.6



RECEIVED SIGNALS IN MOBILE STATION  
IN COMMUNICATION CHANNEL SIGNAL

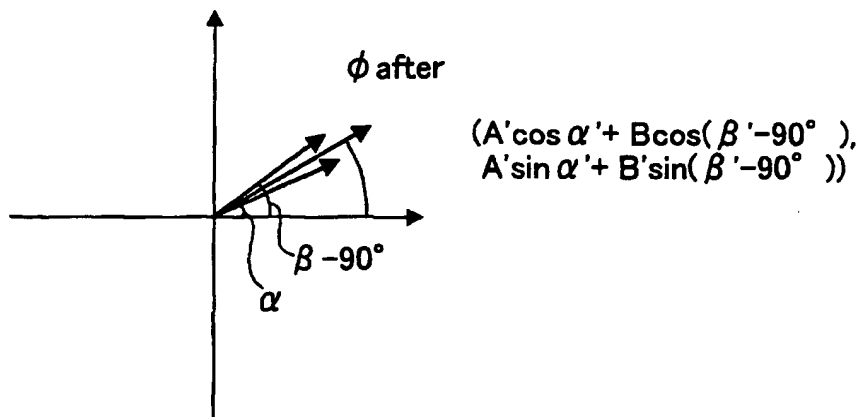


FIG.7

RECEIVED SIGNALS IN MOBILE STATION  
IN COMMON PILOT CHANNEL SIGNAL

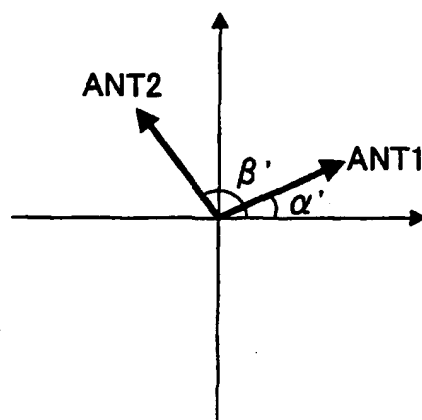


FIG.8

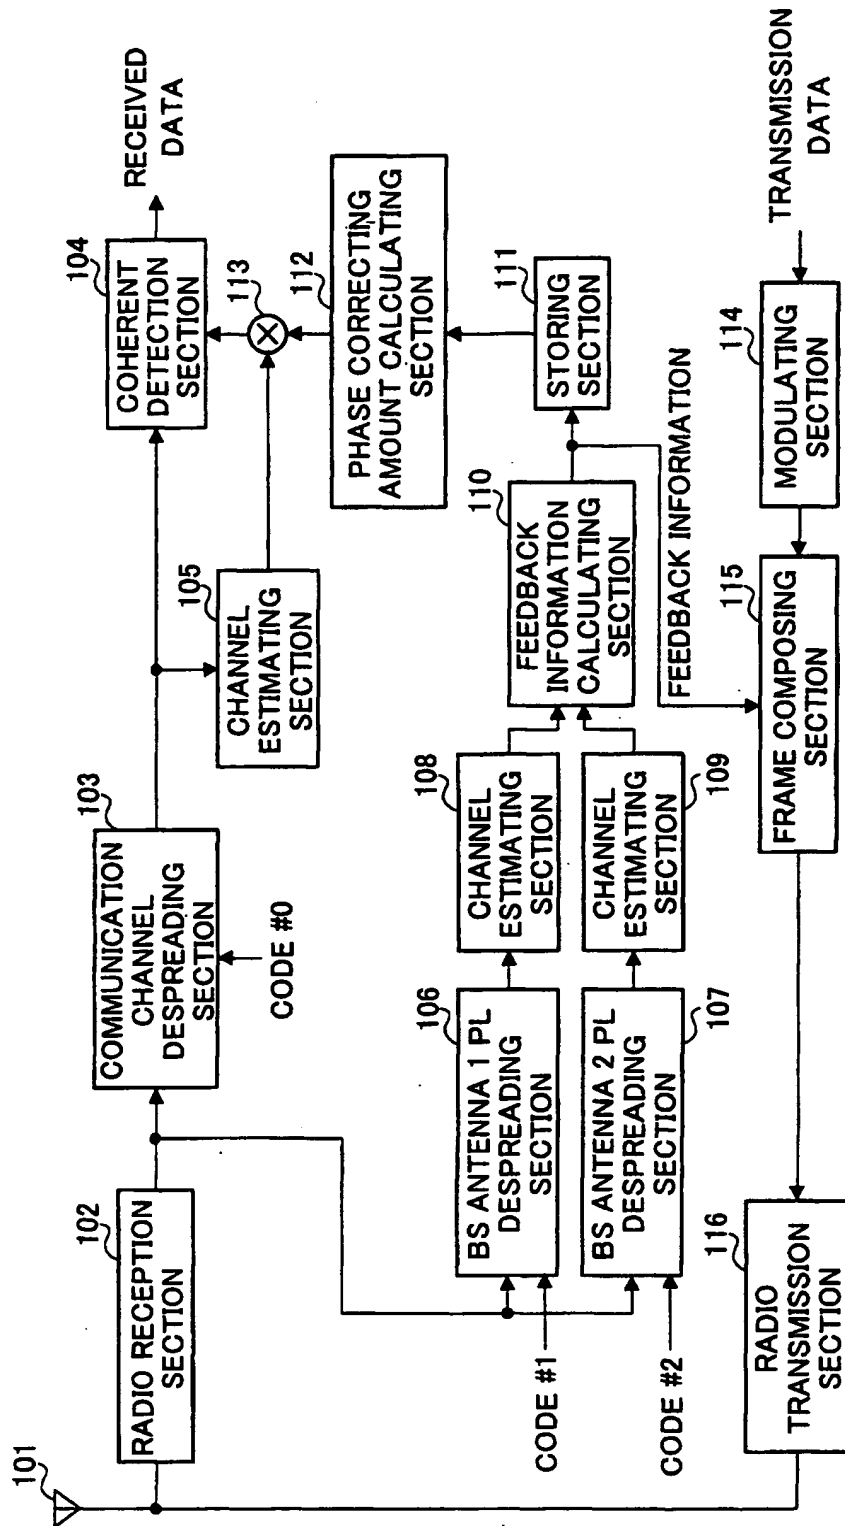


FIG. 9

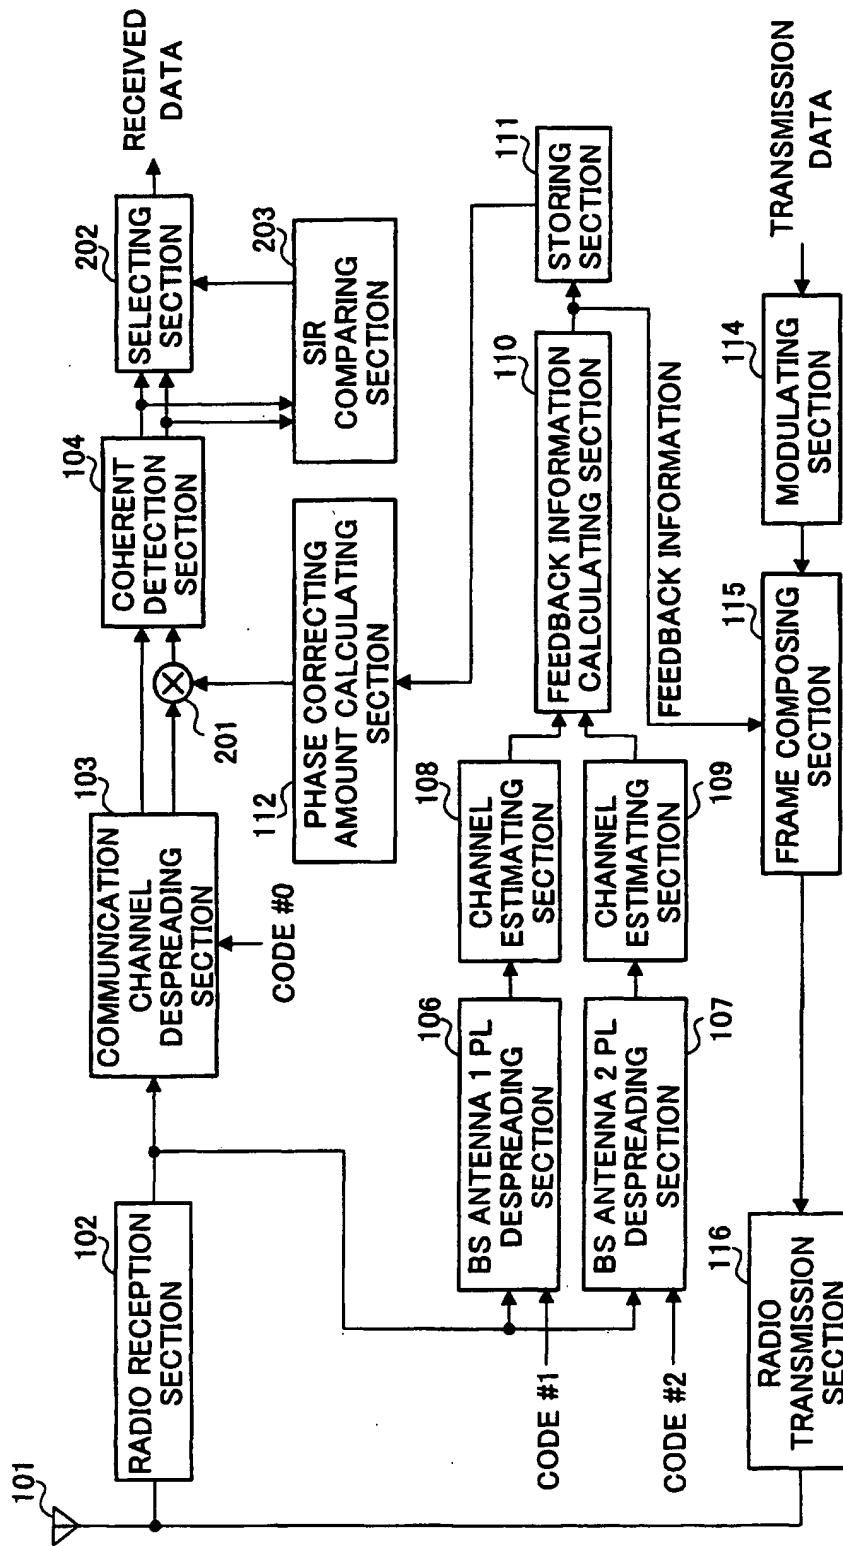


FIG.10

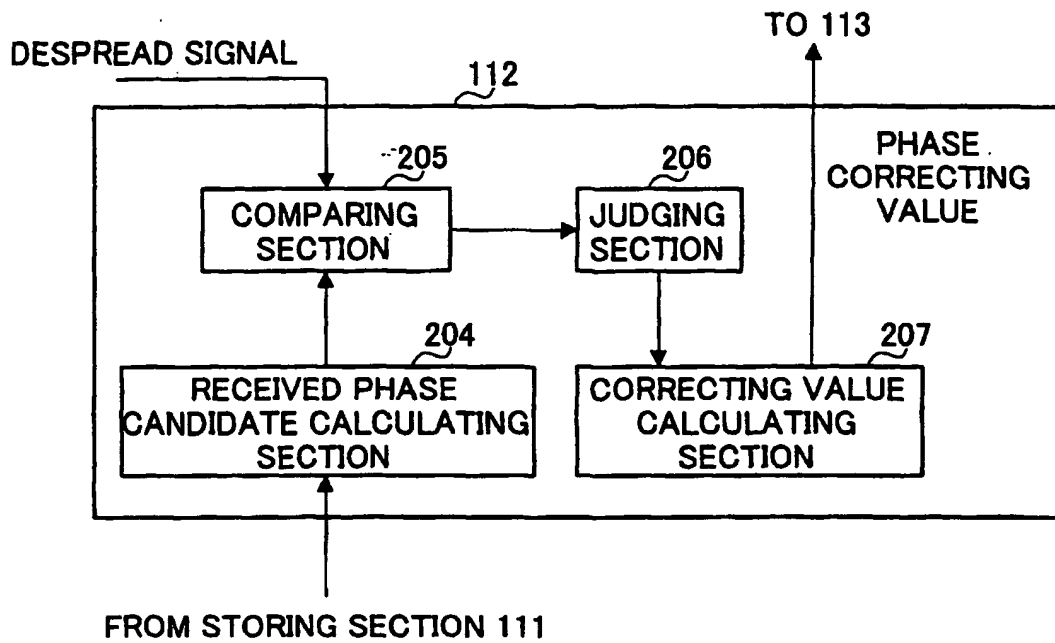


FIG.11

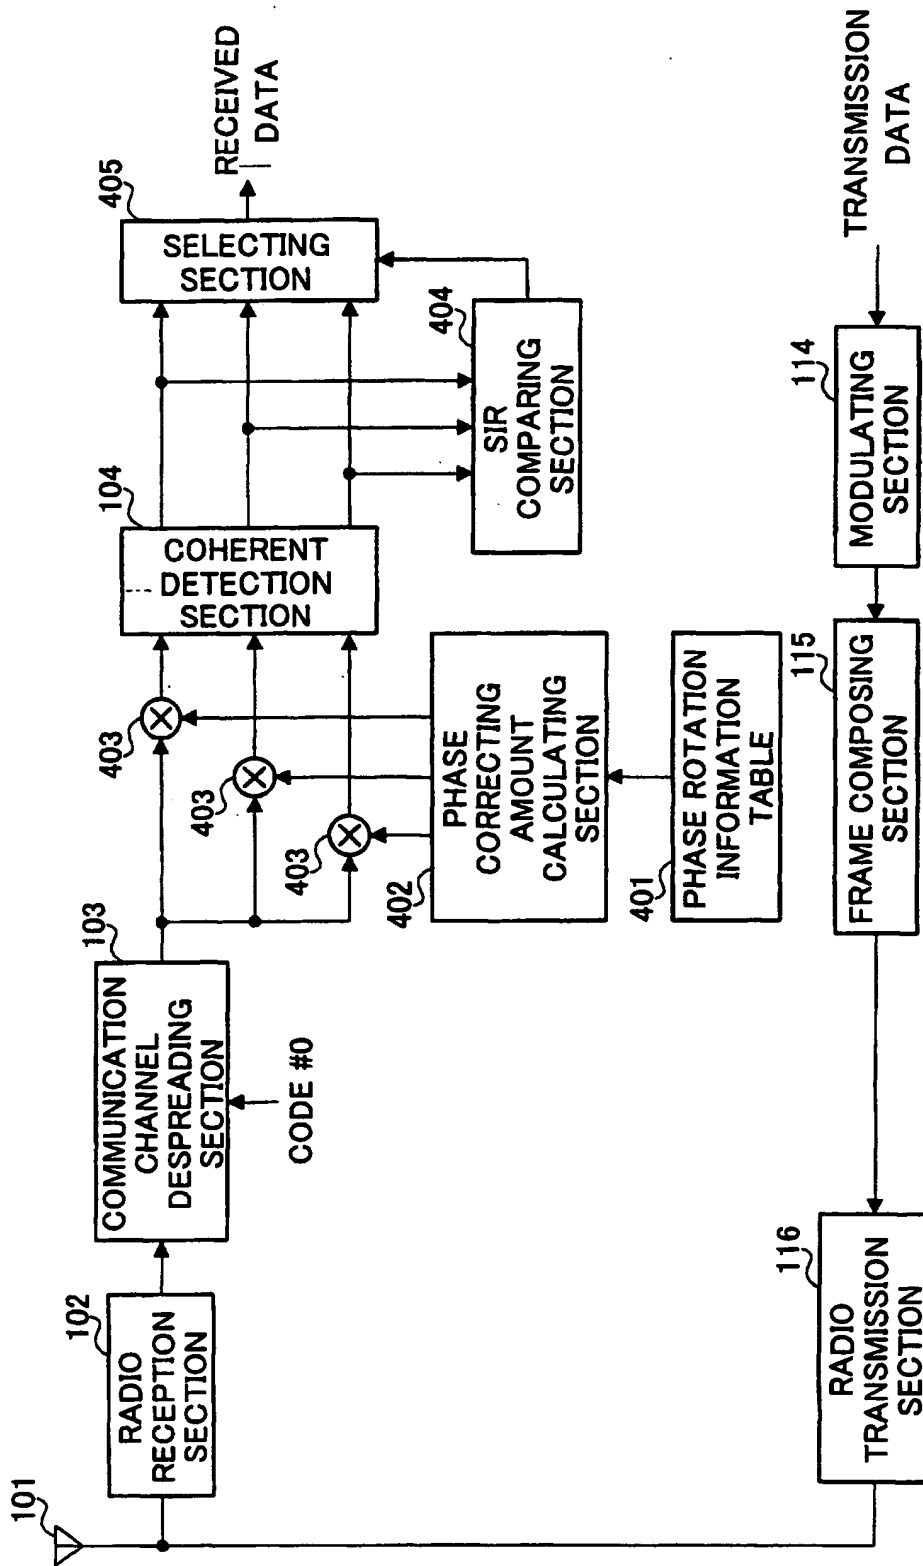


FIG.12

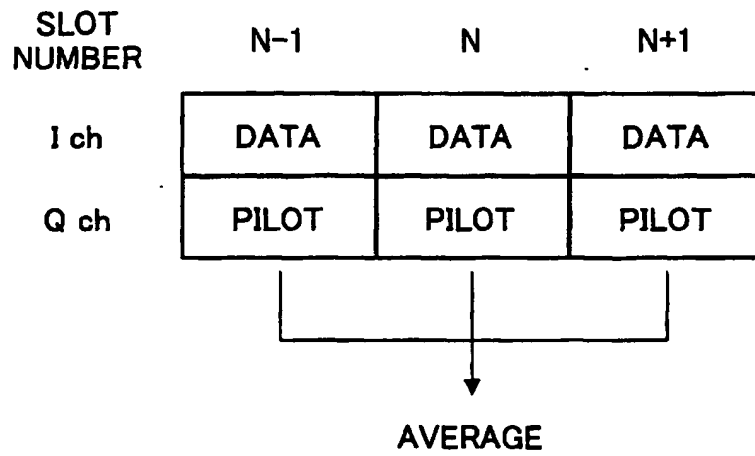


FIG.13

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP00/08151

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl. <sup>7</sup> H04B 7/06, 7/08, 7/26 H04J13/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl. <sup>7</sup> H04J1/00-1/20, 4/00-15/00 H04B7/00, 7/02-7/12, 7/24-7/26 H04Q7/00-7/38 H04L1/02-1/06, 5/00-5/12		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho 1922-1996 Toroku Jitsuyo Shinan Koho 1994-2001 Kokai Jitsuyo Shinan Koho 1971-2001 Jitsuyo Shinan Toroku Koho 1996-2001		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	JP, 5-300059, A (NEC Corporation), 12 November, 1993 (12.11.93) (Family: none)	1-12
A	JP, 4-150113, A (NEC Corporation), 22 May, 1992 (22.05.92) (Family: none)	1-12
A	JP, 3-201629, A (Toshiba Corporation), 03 September, 1991 (03.09.91) (Family: none)	1-12
A	JP, 61-69224, A (Fujitsu Limited), 09 April, 1986 (09.04.86) (Family: none)	1-12
A	JP, 58-87928, A (Nippon Telegr. & Teleph. Corp. <NTT>), 25 May, 1983 (25.05.83) (Family: none)	1-12
A	JP, 58-77348, A (NEC Corporation), 10 May, 1983 (10.05.83) (Family: none)	1-12
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 07 February, 2001 (07.02.01)		Date of mailing of the international search report 20 February, 2001 (20.02.01)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)